

GEDORE

LDA3 Solution Core

3rd generation
of the high-torque cordless wrench



**YOU'VE GOT THE BOLTING CASE.
WE HAVE THE SOLUTION!**

The digital High-torque cordless wrench



Ergonomic handle
for safe working

Low maintenance thanks to
Brushless technology

System power: 720 W
Powerful 90 Wh (18 V/5 Ah)
lithium-ion battery

High positioning accuracy thanks to
intelligent system integration

Transreflective digital colour display

Infinitely adjustable torque from 90 to
8,000 Nm





LDA3 Solution Core




The new high-torque cordless wrench LDAB Solution Core, 3rd Generation


- › powerful, fast and efficient
- › precise cut-off electronics
- › transfective digital colour display
- › ergonomic operation
- › 4-button control panel - Hotkeys
- › Two-handed operation can be enabled
- › Torque-Angular mode included (size 12 and bigger)
- › Designed and manufactured in Germany

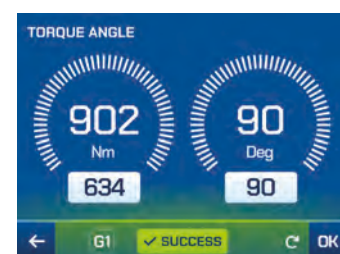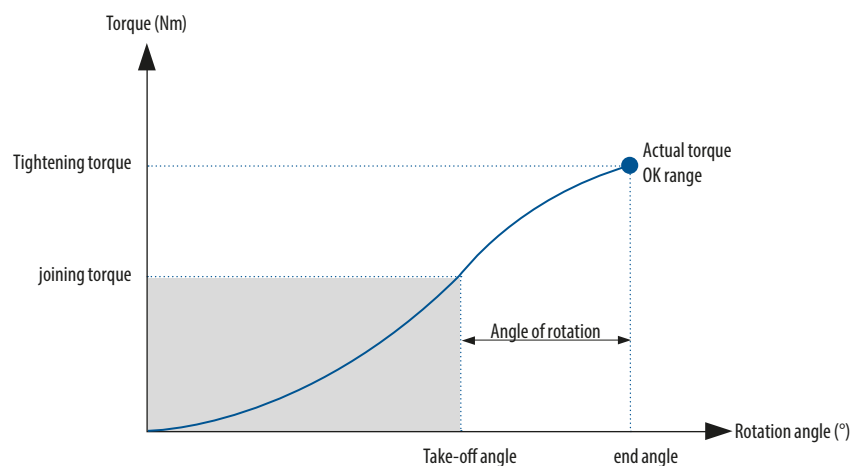

The digital High-torque cordless wrench

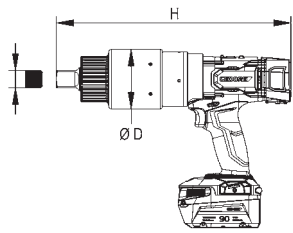

LDA3 Solution Core series – straight version

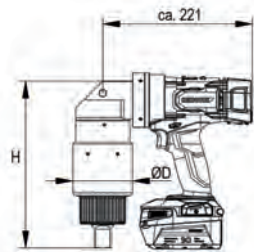

LAW3 Solution Core series – angled version



Type	N·m min ^{*1} /max ^{*2}	~ rpm	■	Ø D mm	H mm	⚖️ ^{*3} kg
LDA3-05 Solution Core	90 - 500	43	3/4"	80	288	3,6
LDA3-07 Solution Core	120 - 700	27	3/4"	80	321	4,2
LDA3-12 Solution Core	150 - 1.200	20	3/4"	80	321	4,2
LDA3-15 Solution Core	220 - 1.500	14	1"	88	336	5,3
LDA3-22 Solution Core	250 - 2.200	11	1"	88	346	5,9
LDA3-32 Solution Core	350 - 3.200	6,3	1"	88	377	6,4
LDA3-40 Solution Core	500 - 4.000	5,5	1"	88	377	6,4
LDA3-60 Solution Core	700 - 6.000	3,7	1 1/2"	102	393	8,2
LDA3-80 Solution Core	900 - 8.000	2,5	1 1/2"	142	425	10,6
LAW3-12 Solution Core	150 - 1.200	20	3/4"	80	223	5,3
LAW3-22 Solution Core	250 - 2.200	11	1"	88	255	7,1
LAW3-32 Solution Core	350 - 3.200	6,3	1"	88	279	7,5
LAW3-40 Solution Core	500 - 4.000	5,5	1"	88	279	7,5
LAW3-60 Solution Core	700 - 6.000	3,7	1 1/2"	102	295	9,3

Other torques available on request

^{*1} Minimum torque in 2nd gear ^{*2} Maximum torque in 1st

^{GEAR*}3 Without reaction arm and battery Battery: 720g

Vibration is less than 2.5 m/s² The average continuous sound pressure level is < 80.0 dB(A). All information is provided without guarantee. We reserve the right to make technical changes.



Contents of the package

- › Device
- › Handle (from LAW3-60 Solution onwards)
- › Reaction arm, cranked, with hold function*, made of chrome-vanadium steel
- › 3x lithium-ion battery (90 Wh/18 V/5 Ah)
- › Charger 220–240 V; 50/60 Hz Tool
- › Toolbox
- › Factory calibration certificate
- › Digital user manual



Optional accessories

- › Straight light-alloy reaction arm with adjustable reaction square and retaining ring
- › Reaction ring (ST) for welding
- › Handrail
- › Comfort carry handle



*Hold function available for 3/4" and 1"



GEDORE Torque Solutions Ltd

Unit 2 Weyvern Park
Old Portsmouth Road
Peasmarsh, Guildford, Surrey
GU3 1NA.

Sales Hotline: +44 (0)1483 894476

Email: salesandrepairs@gedore-torque.com

Website: www.gedore-torque.com